


| "L" OPENING WIDTH (MAX) | ALL WALLS        |                | EXTERIOR WALL       |                     | INTERIOR WALL       |                     |
|-------------------------|------------------|----------------|---------------------|---------------------|---------------------|---------------------|
|                         | KING             | POST           | CRIPPLE STUDS/POSTS | CRIPPLE STUDS/POSTS | CRIPPLE STUDS/POSTS | CRIPPLE STUDS/POSTS |
| 3'-8"                   | 3 RD 1 2 ND 1 ST | 3 RD 2 ND 1 ST | 2x4                 | 2x4                 | 2x4                 | 2x4                 |
| 3'-8"                   | 2x4              | 2x4            | 2x4                 | 3x4                 | 2x4                 | 3x4                 |
| 3'-8"                   | 2x4              | 2x4            | 2x4                 | 4x4                 | 3x4                 | 4x4                 |
| 3'-8"                   | 3x4              | 3x4            | 4x4                 | 4x6                 | 4x4                 | 4x6                 |



- NOTES**
- USE 10d COMMON NAILS AT FLOORS; 8d COMMON NAILS AT ROOFS.
  - GLUE PLYWOOD OR OSB TO FLOOR FRAMING MEMBERS PRIOR TO NAILING.
  - MINIMUM PLYWOOD OR OSB WIDTH IS 24".
  - SEE GENERAL NOTES FOR PLYWOOD OR OSB THICKNESS & GRADE.

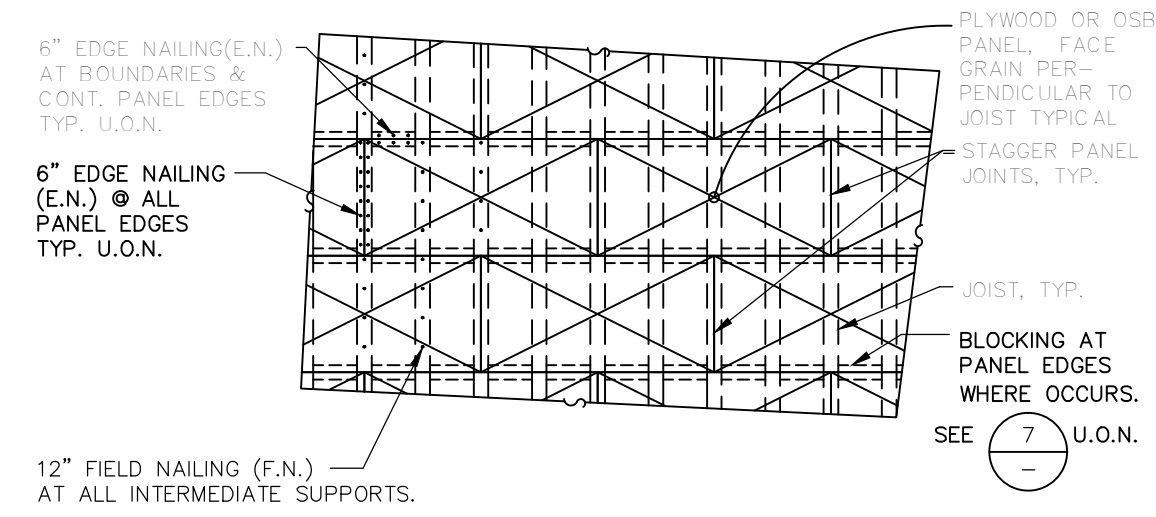